



S2M ENTERPRISES



Traffic & Road Safety Products

Manufacturer & Stockiest

Road Safety Products Manufacturer



SAFETY CONES

Traffic Cones are made of Resistant Virgin Linear Low Density Poly Ethylene (LLDPE) Et Ethylene Vinyl Acetate (EVA) Polymer. Its chemical Et mechanical properties shall withstand even in bad weather conditions Et in extreme change in temperatures (-10 to 60 degrees). It has High Micro Prismatic Reflective Sleeve Band Type IV (as per ASTM D 4956-09) for excellent night visibility). It also has provision for fixing of Plastic Chain or Caution Message Plate. These are also available with heavy weight base fixed at bottom which makes the cone heavy Et it won't fly off with fast traffic or strong winds.



S2M750 F

Height	750 mm
Base Size	385 x 385 mm
Weight	3.8 Kg
Sleeve Size	4"/6" reflective
Body Colour	Red / Orange
Base Colour	Black
Rubber Fitted	Machine Moulded



S2M750 F

Height	750 mm
Base Size	385 x 385 mm
Weight	4.8 Kg
Sleeve Size	4"/6" reflective
Body Colour	Red / Orange
Base Colour	Black
Rubber Fitted	Machine Moulded



S2M750 HR

Height	750 mm
Base Size	385 x 385 mm
Weight	5 Kg
Sleeve Size	6" reflective
Body Colour	Red / Orange
Base Colour	Red / Orange
Rubber Fitted	Machine Molding



S2M750

Height	750 mm
Base Size	380 x 380 mm
Weight	1.8 Kg
Sleeve Size	4" reflective
Body Colour	Red
Base Colour	Black

SAFETY CONES



S2M1000 F

Height	1000 mm
Base Size	420 x 420 mm
Weight	5 Kg
Sleeve Size	6" reflective
Body Colour	Red
Base Colour	Black



S2M1000

Height	1000 mm
Base Size	390 x 390 mm
Weight	4.5 Kg
Sleeve Size	6" reflective
Body Colour	Red
Base Colour	Black



SAFETY CONES ACCESSORIES



CONE CONNECTING ROD

MADE OF PLASTIC AND HAVING TWO CIRCLE RINGS ON THEIR ENDS TO HANG ON SAFETY CONES. TS REFLECTIVE IN NIGHT AND DARK WEATHER.



RUBBERZIED SPEED BREAKERS

Made of Synthetic Rubber with interlocking sub units make it bind perfectly in one firm bump. The bumps are pre - coloured (Black - Yellow) and UV stabilised. Each sub unit studded with good quality reflective Glass Beads on either side. The bumps are not hollow from back side therefore not need to be filled with concrete base. Directly can fixed with Adhesive (Epoxy and Resin) and Bolts or fasteners.

S2M-1200



Length	250 mm
Width	350 mm
Height	50 mm
No. of Pieces Per Meter	4 PC
Load Bearing Capacity	35 Tons

S2M-1014



Length	500 mm
Width	350 mm
Height	50 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	40 Tons

S2M-1012



Length	500 mm
Width	425 mm
Height	50 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	35 Tons

S2M-1013



Length	500 mm
Width	425 mm
Height	75 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	35Tons

S2M-1300



Length	500 mm
Width	400 mm
Height	50 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	40 Tons

S2M-1400



Length	500 mm
Width	400 mm
Height	75 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	40 Tons



Front




Back

S2M-1201

Length	250 mm
Width	350 mm
Height	50 mm
No. of Pieces Per Meter	4 PC
Load Bearing Capacity	40 Tons
Weight	11 Kg

ABS / PE SPEED BREAKERS

SPEED BREAKERS : - Made of ABS (Acrylnitrile - Butadiene - Styrene) / PE (Poly Ethylene) provide with dovetail interlocking sub units make it bind perfectly in one firm bump. The bumps are pre - coloured (Black - Yellow) and UV stabilised. Each sub unit studded with good quality reflectors on either side. The bump are hollow from back side and shall be filled with concrete base and then is to be fixed to ground surface with Adhesive(Epoxy and Resin) and Bolts or fasteners.



S2M1005

Length	250 mm
Width	350 mm
Height	50 mm
No. of Pieces Per Meter	4 PC
Load Bearing Capacity	30 Tons
Colour	Yellow / Black
No. Of Reflectors	2
End Cap	will be extra



S2M1007

Length	500 mm
Width	400 mm
Height	50 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	30Tons
Colour	Yellow / Black
No. Of Reflectors	4
End Cap	will be extra



S2M1006

Length	500 mm
Width	400 mm
Height	75 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	30Tons
Colour	Yellow / Black
No. Of Reflectors	4



S2M1008


Length	250 mm
Width	750 mm
Height	75 mm
No. of Pieces Per Meter	4 PC
Load Bearing Capacity	35Tons
Colour	Yellow / Black
No. Of Reflectors	2

RUMBLERS STUDS AND STRIPS



S2M 1011

Length	500 mm
Width	125 mm
Height	25 mm
Colour	Yellow / Black
No. Of Reflectors	NA
Load Bearing Capacity	15 Tons

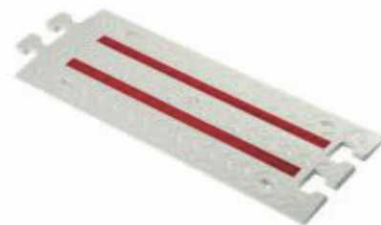

S2M 1011A

Length	500 mm
Width	200 mm
Height	15 mm
Colour	White / Yellow
No. Of Reflectors	2 Reflective Strips
Load Bearing Capacity	35 Tons

Portable Speed Breaker



S2M 1011B

Width	350 mm
Open Length	3 meter
Height	40 mm
Colour	Yellow / Black
Handle	Available
Use as	Portable



S2M 1011PU

Length	500 mm
Width	100 mm
Height	15 mm
Colour	Yellow / Black
No. Of Reflectors	NA
Load Bearing Capacity	35 Tons

S2M 900




Length	250 mm
Width	150 mm
Height	32 mm
Colour	Yellow
No. Of Reflectors	2
Load Bearing Capacity	30 Tons

S2M 901



Length	275 mm
Width	150 mm
Height	32 mm
Colour	Yellow
No. Of Reflectors	4
Load Bearing Capacity	35 Tons

S2M 902



Length	270 mm
Width	150 mm
Height	32 mm
Colour	Yellow
No. Of Reflectors	12 Glass Beads
Load Bearing Capacity	60 Tons

S2M 5000


Material	HDPE Plastic
Density of Material	0.950 g/cm ³
Height	1000mm
Width	440 mm x 50 mm
Base Overall Shape	450 mm x 600 mm
Advertisement Area	380mm x 600mm
Weight w/o Filling	4 Kgs
Weight with Filling	Upto 20 Kgs
Colour	Grey & Red
Reflective	High reflective advertisement sticker
Portability	Portable & Easy to Move



Application Area : Industrial, Commercial, Construction Sites, Diversion, Area Marking, Warning, Advertisement & Promotion in Outside Retail Stores, Malls, Parking Areas, Airports etc.



ROAD BARRIERS

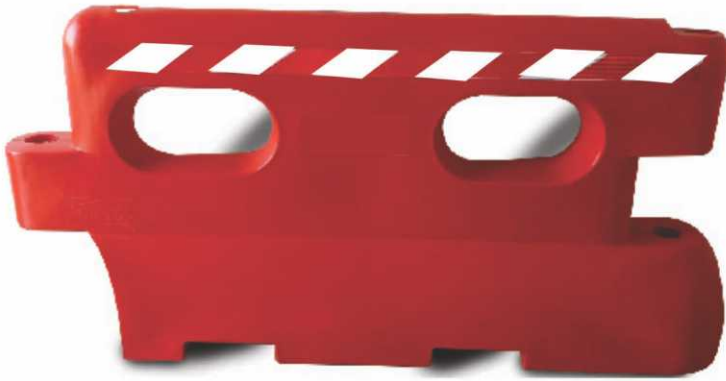

Size L : 2140XW-400X H-1000 MM
WATER BALLAST : 100 LTR

Lenght	1650 mm
Width	600 mm
Hieght	1000 mm
Colour	Red
Water Capacity	50 ltr.

Key Features:

- > Lightweight make it very easy to install or de - Install even with single person
- > Modular design allows choosing the desired length
- > Tongue & groove interlocking system holds the barrier in place
- > Plank barrier reduces the cost by nearly 40%
- > Stand Barriers are detachable for low transportation cost
- > Provides greater degree of safety than drums
- > Highly visible around work zones with coloured interlocking sections



Available Colours :



BARRIER 2 OVAL

Key Features :

- High impact resistance
- 2 mtr. length works out most economical
- Easy to setup and knockdown
- Interlocking barriers enables continuous lines
- High impact resistant, long lasting colors
- Provision to put reflective markers/Tapes



BARRIER PYRAMID



Size L : 1000xW-490X H-815mm
Water Ballast : 25 ltr.

ROAD BARRIERS

FENCE WITH STAND



Size L: 2010X W-40X H-1010MM



Size L: 400X W-150X H-735MM



Key Features:

- > High Impact Resistant, long lasting colours, UV stabilized PE barriers
- > 2 mtr. length works out most economical
- > Extremely easy to setup and remove
- > Interlocking barriers enables continuous lines
- > Feet can be adjusted 360 degree

Available Colours :



Key Features:

- > Unique double walled structure which saves space and freight cost by 75%
- > No sharp edges or corners, smooth exterior finish deters graffiti
- > Quick and easy to assemble
- > Use of water inside reduces loss of life & damage to vehicles
- > High impact strength, UV stabilized and long lasting colors
- > Finish and colour treatment for high visibility even in work zones with dense infrastructure and manpower.
- > Aids in clear movement guidance for pedestrians and vehicles in hazardous zones.



Available Colours :



BARRIER 6 VERTICAL



Size L: 1610X W-415X H-1020MM
Water Ballast : 60 Ltr.

ULTRAFLEX POST AND LANE DIVIDER

Premium Highly Flexible Post: Made of PU (Poly Urethane) and Superior Durability for Unaffected by outdoor temperature variations. It has low maintenance Post. Base of Post Should be install by Ad-hesive or Anchor Fastener and Pole will be fixed on base through a specific 8mm thick Aluminum Pin. The Posts are available in many other flour cent colors.



S2M-865

Height	900 mm
Base Dia	170 mm
Pole Dia	78 mm
Reflective Band	3 band
Band Size	75 mm
Colour	Orange/Yellow



S2M-933

Pole Size	80 x 710 mm
Pole Colour	Orange
Base Length	750 mm
Base Width	250 mm
Base Height	75 mm
Colour	Yellow/Black

POST & LANE DIVIDER



S2M-875

Height	920 mm
Base Dia	1000x150x40 mm
Pole Dia	78 mm
Reflective Band	3 band
Band Size	75 mm
Colour	Orange/Yellow
Chain Slot	Available



S2M-933A

Pole Size	80 x 1000 mm
Pole Colour	Orange
Base Length	750 mm
Base Width	250 mm
Base Height	75 mm
Colour	Yellow/Black

CENTRE VERGE WITH FLEXIBLE POST



S2M-936A

Pole Size	78 x 900 mm
Pole Colour	Orange
Base Length	750 mm
Base Width	250 mm
Base Height	70 mm
Colour	Orange/Yellow/Black

SPRING POST OR FLEXIBLE CITY DELINEATORS

S2M-1901



Pole Dia	80 mm
Height	1000 mm
Reflective Area	4 x 65 mm
Base Dia	200 mm with Interlocking



S2M-1902

Pole Size	100 x 50 mm
Height	750 mm
Reflective Area	100 x 400 mm
Base Dia	200 mm



S2M-1903

Pole Size	100 x 50 mm
Height	900 mm
Reflective Area	100 x 500 mm
Base Dia	200 mm



S2M-1902 A

Pole Size	100 x 50 mm
Height	750 mm
Reflective Area	100 x 400 mm
Base Dia	340 mm & 4.5 kg Rubber Base



City Bollard Post :

Made of PU (Poly Urethane) and Unbroken When bending. It highly flexible and behave like Spring Bollards Post. The Bollards has interlocking system in its base due to which it easy to install through Anchor Fastener Only.

Application: - Lawn Area Barricade, Meadians, Sports Area and Outdoor Parking etc.



S2M-2214

Pole Dia	80 mm
Height	900 mm
Colour	Black / Yellow
Square Base	200 mm with Interlocking

SPRING POST OR FLEXIBLE DELINEATORS

SPRING POSTS by Pioneer Swift are made of UV Resistant special flexible PU material capable to restore to its original state without damage to the vehicle or to the spring post. It has high impact resistance Et tensile strength. Its chemical a mechanical properties shall withstand even in bad weather conditions Et in extreme change in temperatures (-10 to 70 degree celsius). It has High Intensity Micro Prismatic Type IV Reflective Bands (as per ASTM D 4956-09). The Spring Posts are installed by applying epoxy Et nails.

APPLICATION Spring Posts are used at/for Center Lane Dividing, Dangerous U-Turn, Dangerous Medians, Sharp Curves, Construction Zones, No-Entry Zones, Multi-Lanes, Parking Lots, Freeways, Highways Et more.

S2M-934



Height	300 mm
Base Dia	200 mm
Pole Dia	80 mm
Reflective Band	1 band
Band Size	75 mm

S2M-935



Height	600 mm
Base Dia	170 mm
Pole Dia	78 mm
Reflective Band	3 band
Band Size	75 mm

S2M-930



Height	710 mm
Base Dia	200 mm
Pole Dia	80 mm
Reflective Band	2 bands
Band Size	75 mm

S2M-932



Height	750 mm
Base Dia	200 mm
Pole Dia	80 mm
Reflective Band	3 bands
Band Size	65 mm

S2M-932 (Eco)



Height	750 mm
Base Dia	200 mm
Pole Dia	80 mm
Reflective Band	3 bands
Band Size	65 mm
Weight	600 gm

S2M-988



Height	800 mm
Base Size	200 mm
Pole Dia	80 mm
Reflective Band	3 bands
Band Size	70 mm

S2M-1900



Height	900 mm
Base Dia	200 mm
Pole Dia	80 mm
Reflective Band	4 bands
Band Size	75 mm



S2M-1910

Upper Dia	80 mm
Lower Dia	60 mm
Height	800 mm
Reflective Area	up to 300 mm



S2M-1905

Pole Dia	85 mm
Height	780 mm
Reflective Area	1No. 75mm
Fixation Screw	Galvanized steel
Glass Beads	58 Nos. Glass Beads Bottom Only



S2M-1906

Pole Dia	85 mm
Height	825 mm
Reflective Area	1No. 75mm
Fixation Screw	Galvanized steel
Glass Beads	58 Nos. Glass Beads Top & Bottom

METAL BEAM CRASH BARRIER (MBCB) are basically road system which prevent vehicles from with colliding obstacles such as boulder, walks also prevent vehicles entering into large storms, drains, steep slopes or deep water.

Component of MBCB

- # W Beam
- # Cold Roll formed in thickness 3.00mm / 2.6mm
- # Hot Dip galvanised to 550gms/Sq,m

- #Post and Spacers
- # Cold Roll formed in thickness 5.00mm / 4.2mm
- # Hot Dip galvanised to 550gms/Sq,m



Single Faced
Single Barrier



Single Faced
Double Barrier



Double Faced
Single Barrier



Double Faced
Double Barrier



ROAD FENCE BARRICADE

S2M made extremely sturdy flexible fence barrier. It will fix on the road by chor fasteners and Adhesive. It can be fixed individually or can fix in continuity like a Row. The post of the Barrier are made of highly impact resistant Poly Urethane (PU) material and Bars are made of Poly Ethylene (PE) which are also high impact resistant or capable to bear crush impact.



S2M-1921

Length	2050 mm
Pole Dia	110 mm
Height	980 mm
Reflective Area	2 No. x 65 mm per pole & Bars are fully reflective.
Base Dia	200 mm
2 No. of poles & 3 No. of bars complete 1 set of barrier.	



Color Option available



METALLIC TUBULAR REBOUNDABLE POST

Pole Dia		Post Material	PE Plastic	Base Size	200 x 200 mm or 200 mm dia
Height	950 mm	Colours	White, yellow, orange, red	Base Material	Nylon
Pole Wall Thickness	5 mm	Type	Fixed, quick release or drivable	Base Colour	Black

METALLIC TUBULAR REBOUNDABLE POST



FULLY REFLECTIVE

FULLY REFLECTIVE

Installs with Anchors or Epoxy

There should be 3 Nos. x 75mm or 2 Nos. x 100mm Retro-Reflective Sheeting, High Intensity sheeting, Diamond grade sheeting Colour should be : White or Yellow on Pole for High visibility.

Pole Dia	60 mm
Height	950mm subject to increase or decrease as per requirement
Pole Wall Thickness	5 mm
Post Material	PE Plastic
Colours	White, yellow, orange, red
Type	Fixed, quick release or drivable
Installation	The Lane Divider Base Length should be 1000mm, width should be 150mm, Height of Lane Divider should be 40mm and color should be orange non fading and UV stabilized. There should be 8 No. holes in Lane Divider Base for fixing on surface by using MS Nails or Fasteners and epoxy. There should be 3 Nos. x 75mm or 2 Nos. x 100mm Retro-Reflective Sheeting, High Intensity sheeting, Diamond grade sheeting Colour should be : White, Yellow, Orange Red, Green, Blue on Pole for High visibility.

S2M-1984

METALLIC TUBULAR REBOUNDABLE POST WITH LANE DRIVER

Metallic Tubular Reboundable Post with Hazard Markers



FRONT



BACK

S2M-1985

Pole Dia
Height
Poll Wall Thickness
Post Material
Colours
Type
Base Size
Base Material
Base Colour
Installation

60 mm
950 mm subject to increase or decrease as per requirement
5 mm
PE Plastic
White, yellow, orange, red
Fixed, quick release or drivable
200 x 200 mm
Nylon
Black
Installs with Anchors or Epoxy
There should be 12" x 24" yellow flexible high intensity ACP sheeting with black legend. Overall height of unit should be 36" and fitted with two no. Nut bolt along with Pole. There should be 4" Yellow & 4" Black strip on 3mm ACP sheet as per size mention above and as per requirement



Metallic Lane Divider Reboundable Post with Hazard Markers



S2M-1986


Pole Dia
Height
Poll Wall Thickness
Post Material
Colours
Type
Base Size
Base Colour
Installation

60 mm
950 mm subject to increase or decrease as per requirement
5 mm
PE Plastic
White, yellow, orange, red
Fixed, quick release or drivable
1000 x 150 x 40 mm
Orange
Installs with Fasteners and epoxy
There should be 12" x 24" yellow flexible high intensity ACP sheeting with black legend. Overall height of unit should be 36" and fitted with two no. Nut bolt along with Pole. There should be 4" Yellow & 4" Black strip on 3mm ACP sheet as per size mention above and as per requirement



ABS ROAD STUDS / CAT EYES

(ABS) PLASTIC ROAD STUDS: - Raise Reflective Pavement Marker made of Engineering Grade ABS Body with Polycarbonate / Acrylic micro Prismatic reflectors.

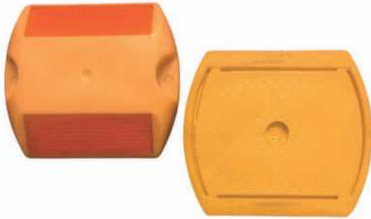

S2M-972
90mm X 100mm X 18mm



S2M-972A
90mm X 100mm X 18mm
with Hole



S2M-998
100mm - Dia



S2M-976
100mm X 100mm X 20mm
Mesh Type



S2M-976A
100mm X 100mm X 20mm
with Solid Base



S2M-976B
100mm X 100mm X 20mm
with Double Shank



90mm x 100mm x 20mm




S2M-979A
90mm x 100mm x 20mm
with Nails



S2M-979B
90mm x 100mm x 20mm
with Double Shank



S2M-971 P
110mm X 128mm X 30mm



S2M-999
130mm X 150mm X 30mm




S2M-977
100mm X 100mm X 18mm
with 6 Glass Beads



ABS ROAD STUDS / SOLAR STUDS & FLASHER




S2M 971P
110mm X 128mm X 30mm

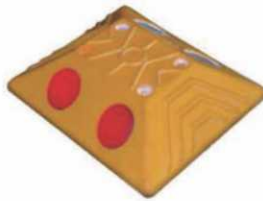

S2M 999
130mm X 150mm X 30mm



S2M 977
100mm X 100mm X 18mm
with 6 Glass Beads



3M REGULAR



3M DOUBLE SHANK



AVERY DENNISON

SOLAR POWERED ROAD STUDS OF ALUMINIUM ALLOY WITH 3 LED's EACH SIDE

1. Model No. PS 970 : Aluminium Solar Studs :

The Solar studs have automatic switching on & off system under dark weather and bright conditions & each unit should be completely independent composite unit.

- Construction – Aluminium
- 100% water proof
- Dimension – Apx. 125mm x 125mm x 20mm (Shank Size – 30mm)
- One Ni-Mh rechargeable battery (1.2v / 1600mA)
- Three super bright LED's on each side with over 5000mcd (Milicandle) luminous intensity.
- View Distance – More than 500Mtrs
- Bearable weight Capacity – Apx - 10Tons
- Working Time – 2 to 3 Days after fully charged battery
- Charging time apx – 6Hrs from direct sunlight.
- Color of LED's – Amber / Red / Green



S2M 970B



S2M 970A

2. Model No. PS 966 / 967 : Aluminium Solar Flasher & Delineator:

The Solar Power Flasher made of Poly Carbonate cup apx. Dia – 80mm and 90mm height fitted on aluminium base / PE base in such a way that it can be fitted in suitable MS Pipe. The Solar flasher has solar power unit at the top to make it easy for charging in day time and below the solar power unit provide with six Red/Yellow colour LED to blink in the night time.



S2M 966



S2M 966A



S2M 967

SAFETY ALUMINIUM ROAD STUDS

ALUMINIUM ROAD STUDS: - Raise Reflective Pavement Marker dual Directional made of Aluminum Alloy Body with proper Acrylic or Poly Carbonate Prismatic Reflectors.



S2M-975

100mm X 100mm X 20mm
with Hole



S2M-973

100mm X 100mm X 20mm
with 20mm Shank



S2M-965

100mm X 100mm X 20mm
with 7 x 3 Glass Beads & Hole



S2M-964A

100mm X 100mm X 20mm
with Shank



S2M-964

100mm X 100mm X 20mm



S2M-962

100mm X 100mm X 20mm
with 7 x 3 Glass Beads & Shank




S2M-620A

100mm X 100mm X 20mm
with 7 x 3 Glass Beads & Hole



S2M-973A

100mm X 100mm X 20mm
with 43 Glass Beads & Shank



S2M-975A

100mm X 100mm X 20mm
with 43 Glass Beads & Hole

ANTI GLARE BOARD

ANTI GLARE BOARD

Changeable Prefabricated Dual Bracket

This Anti Glare board is designed to easily install to any guardrails of which width sizes are varied by adjusting the changeable prefabricated dual bracket patented by Pioneer Swift.

Key Features

- Easier to assemble and stronger structure
 - Convenient installation with a bolt fastening method
- Possible to mount on any guardrails with various width sizes
Streamlined shape not to be affected by wind



Model	S2M-2116	S2M-2125	S2M-2117	S2M-2122	S2M-2126
Height	600mm	600mm	600mm	600mm	700mm
Width	230mm	200mm	282mm	230mm	230mm
Base	230x150mm	200x100mm	200x50mm	100x100mm	230x150mm
Thickness	5mm	4mm	3mm	5mm	5mm
Reflective	ReflectiveTape	ReflectiveTape	Reflectors	ReflectiveTape	ReflectiveTape



PVC MESSAGE CONES / BOLLARDS

FOUR HEADED MESSAGE CONES WITH SAFETY SIGNS

We have developed a new line of products which enable operators to follow the latest safety rules and prevent accident at work.

Wholly in plastic . These signs are lights and strong at the time they are hardy, easy to use and robust, and can be easily moved around. If placed outside they resist wind blows.



PLASTIC VIEW CUTTER / ANTI GLARE PANEL SYSTEM FOR HIGHWAYS

Made of durable, flexible, impact resistant plastics. It reduces road accidents by protecting drivers from the flash lights going in the opposite directions. Reverse S Shape Construction

Application :

Highways, Motor Ways, Tool Ways, Freeways, Road Curves, Flyovers,

Features

Fire retardant temp range - 30 c to + 80 c Flexible & cost saving May be mounted to concrete or steel, easy adjustable of angle, low maintenance, Huge cost savings

Model - RS AG - 900
Colour - Green

Size : 900 mm x 200mm x 5mm


900mm is the most widely used size, resistant to environmental. Factors like sun / rain / snow/ wind



METAL PIPE SAFETY BOLLARD

Meant to guide the traffic installed at crossing / start of central verge diversions etc. Consists of 2/3 plates

Square Plate With 9 Acrylic Reflects
Message Plates (optional)
Round Plate With Hip Retro Reflective Tape Mounted On Powder Coated M.s.pipe



FLUORESCENT REFLECTIVE BOLLARD
Consists of
✓ Central M.S. Square Rod
✓ Reflective cylindrical ACP Box
✓ Powder Coated M.S. Base Plate
✓ Circular Top Arrow Box



SPECIFICATIONS OF SOLAR TRAFFIC BLINKER - 300mm

- # Solar Cell : Type - Mono Crystalline / Poly Crystalline
- # Voltage : 18V / 450mA.
- # Batter : Type - Plumbic acid, Voltage - 12V / 7.2Ah.
- # LED : Size 5mm, 61 Numbers LED encapsulated in Conves lenses
- # Luminous Intensity : 8000 - 9000 mcd.
- # Colors : Red or Yellow.
- # Operationg Time : Sustain power supply continously for over 4 days when in the wet or rainy days after fully - charging.
- # Also Available in 200 mm



PLASTIC SCISSOR BARRIER


PLASTIC SCISSOR BARRIER

This Scissor Barrier light weighted for easy to carry. The User can adjust the working length as per their choice or according to actual demand. It is pasted with highly reflective sheeting on the strips to reflective in night and plays a good role for warning. The design of side stands can be in filled by water to increase the weight.

S2M B200

Height
Closed length
Opened length
Width
Weight
Weight with water
Colour of stand
Colour of strips


950 mm
250 mm
2500 mm
370 mm
3kgs
upto 7-8 kgs.
Yellow
Red and Yellow

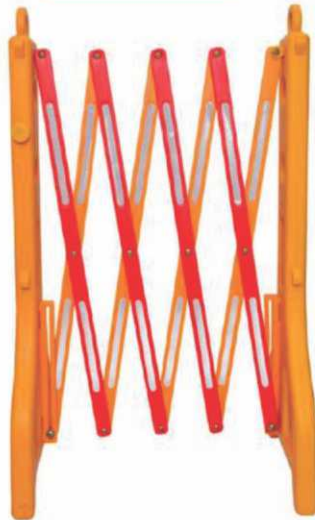

S2M B200A

Height
Closed length
Opened length
Width
Weight
Weight with water
Colour of stand
Colour of strips

950 mm
450 mm
3500 mm
370 mm
5 kgs
upto 8-10 kgs.
Yellow
Red and Yellow

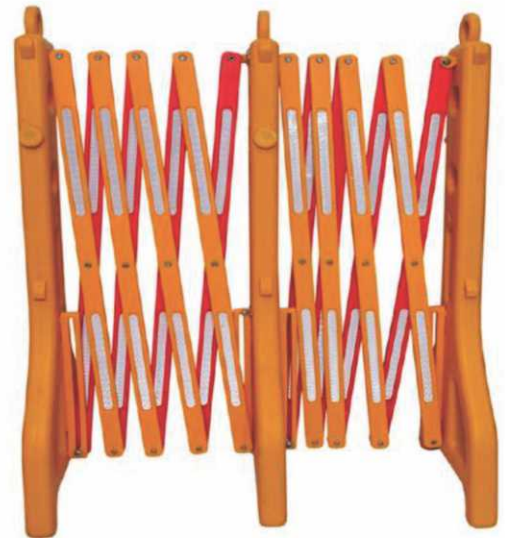


S2M B201



Height
Closed length
Opened length

1 mtr
300 mm
2.7mtr

S2M B202

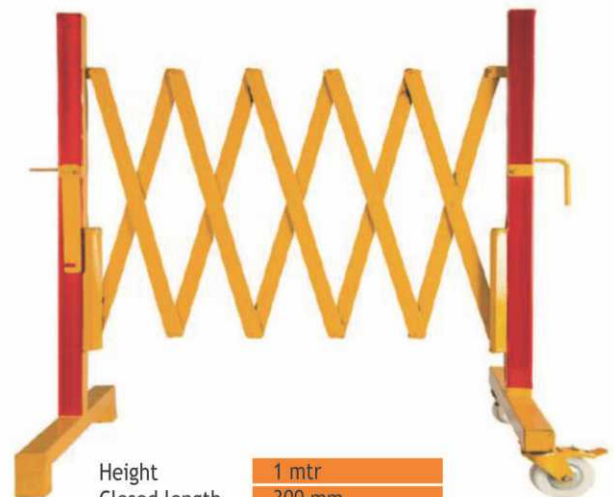

Height
Closed length
Opened length
Wheel Nylon


1 mtr
300 mm
2.7 mtr
2 Nos

METAL EXPANDABLE BARRIER



S2MB-1

HEIGHT	1MTR/1000MM
OPEN LENGT H	3.5 METER
WEIG HT	29KG
WHEEL S	4 NYLON WHEEL S 100MM
MATERIAL	MILD STEEL(METAL)
PAINT	POWDER COATED
THICKNESS	1.6MM
PIPE	70X70MM
MOVALBLE FLAT STRIP SIZE	40X20MM



S2MB-2

HEIGHT	1.2MTR/1200MM
OPEN LENGT H	3.5 METER
WEIG HT	33KG
WHEEL S	4 NYLON WHEEL S 100MM
MATERIAL	MILD STEEL(METAL)
PAINT	POWDER COATED
THICKNESS	1.6MM
PIPE	70X70MM
MOVALBLE FLAT STRIP SIZE	40X20MM




S2MB-3

HEIGHT	1.2/1.5MTR, 1200/1500MM
OPEN LENGT H	5 METER
WEIG HT	50/60 KG
WHEEL S	6 NYLON WHEEL S 100MM
PAINT	POWDER COATED
THICKNESS	1.6MM
PIPE	70X70MM
MOVALBLE FLAT STRIP SIZE	40X20MM



S2MB-4

HEIGHT	1MTR
OPEN LENGT H	4MTR/6MTR
WEIG HT	25KG/30KG
WHEEL S	6 NYLON WHEEL S 50MM
PAINT	POWDER COATED
THICKNESS	2MM
PIPE	37.5MM X 37.5MM
MOVALBLE FLAT STRIP SIZE	37.5MMX2MM

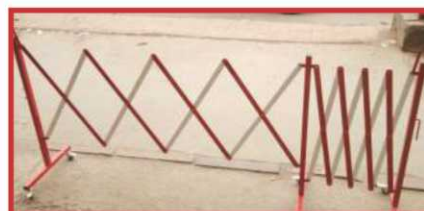

WARNING BOLLARDS & ACCESSORIES

Warning Bollard can be used as unique body or assembled with big sign boards to make barricade. These barricades are widely used in social activities or events as well as construction areas by its clip to extend each other. Collapsed boards can be used for indoor or outdoor areas. It is easy to stack with foldable foot. Weather resistance between -20° to +60° Celsius.

Application: Barriers are used for Lane Dividing, Dangerous Area, Dangerous Medians, Sharp Curves, Constructions Zones, No-Entry Zone, Multi Lanes, Parking Lots and Highway etc.



S2M 3000

Height	1200 mm
Pole Dia	100 mm
Base Dia	350 mm
Base Height	75 mm
Reflective Band	4nos x 75mm
Weight	12.5 Kgs
Message Slot	Slot plate at top



S2M 3000A

Height	1300 mm
Pole Dia	100 mm
Base Dia	440 x 440 mm
Base Height	75 mm
Reflective Band	4nos x 75mm
Weight	8.5 Kgs



S2M 3000B

Height	1050 mm
Pole Dia	100 mm
Base Dia	400 x 400 mm
Base Height	40 mm
Reflective Band	1nos x 250mm
Weight	6 Kgs







Also available with Rubberized Base, Weight - 10Kgs

Bollard's Accessories



S2M 3005

S2M 3006

S2M 3007

S2M 3008


WARNING BARRICADING BOLLARDS

Warning Barricading Bollard can be used as unique body or assembled with big sign boards to make barricade and highly visible in night. These barricades are widely used in social activities or events as well as construction areas by its clip to extend each other. Collapsed boards can be used for indoor or outdoor areas. It is easy to stack with foldable foot. The Sign Board of Barricading Bollard is made on ACP (Aluminium Composite Panel) Sheet with HIP (High Intensity Prismatic) reflective tape. We can make any design on board as per your requirements. Weather resistance between -20° to +60° Celsius.



S2M 3200

Dimension LxH	2000 x 1200 mm
Pole Size	100 x 1200 mm
Sign Board Size	750 x 1200 mm
Weight	35 Kgs
Material	PP-CP Body - PP Base - Reflective sheeting 3mm ACP
Features	Reflective sheeting - sand filled base - wind resistance - water resistance - easy to assemble and dismantle

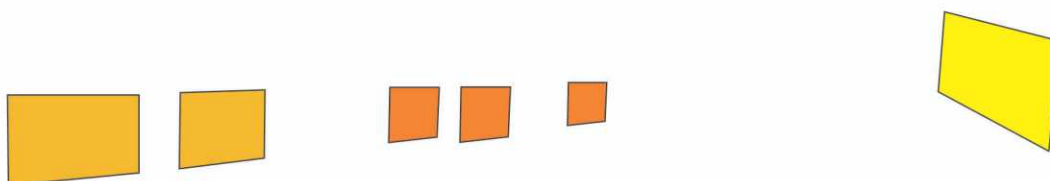

WARNING BOLLARDS



SPRING BOLLARD 800 MM WITH HEAVY BASE

HEIGHT	800 MM
BASE DIA	260 MM
POLE DIA	315 MM
TAPE SIZE	13.5 INCH X 1 TAPE
WEIGHT	WEIGHT- 2.500 KG



SPRING BOLLARD 1200 MM WITH HEAVY BASE

HEIGHT	1180 MM
BASE DIA	260 MM
POLE DIA	315 MM
TAPE SIZE	13.5 INCH X 1 TAPE
WEIGHT	6 INCH X 1 TAPE 2.720 KG




WARNING BOLLARD WITH BASE

HEIGHT	1230 MM
BASE SIZE	420 MM
POLE DIA	325 MM
TAPE SIZE	4.5 INCH X 2 TAPE
WEIGHT	6.520 KG

CABLE PROTECTOR

CABLE PROTECTOR

SIZE	L 1000 x W 250 x H 60MM
CABLE SIZE	H 45 x W 70MM




CABLE PROTECTOR

SIZE	L 1000 x W 250 x H 50MM
CABLE SIZE	H 30 x W 30 MM x 2




CABLE PROTECTOR

SIZE	L 1000 x W 300 x H 50MM
CABLE SIZE	H 30 x W 30MM x 3

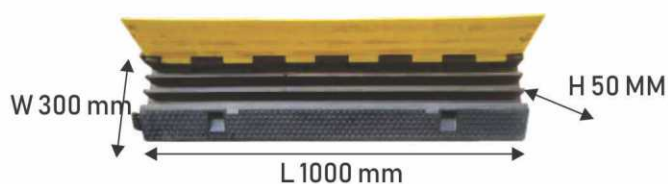

CABLE PROTECTOR

SIZE	L 900 x W 500 x H 70 MM
CABLE SIZE	H 50 x W 60MM x 3

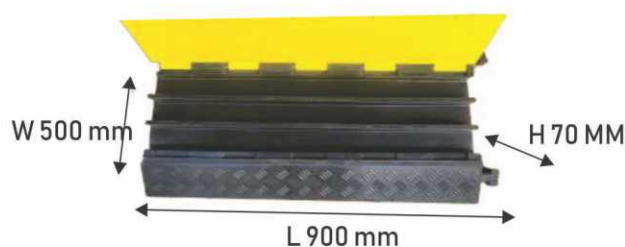

TRAFFIC BATONS/HAND HELD FLASHER (RECHARGEABLE)



FLASHER

SIZE	54CM
DIA	4CM
LEDS	6R+6G+1W (TORCH)
FUNCTION	RED FLASH, RED STABLE GREEN FLASH, GREEN STABLE TORCH ON TOP
TORCH	YES
BATTERY	RECHARGEABLE BATTERY
MATERIAL	PIPE- PVC, HANDLE-AS
LIGHT AREA	340MM



FLASHER

SIZE	36CM
DIA	4CM
LEDS	9R+9G+1W TORCH
FUNCTION	RED FLASH, RED STABLE GREEN FLASH, GREEN STABLE TORCH ON TOP
TORCH	YES
BATTERY	RECHARGEABLE BATTERY 3PCS 600MAH NIMH BATTERY
MATERIAL	PIPE-PC HANDLE-ABS
LIGHT AREA	260MM

FLASHER WHISTLE

SIZE	40CM
DIA	4CM
LEDS	9R+9G+1W TORCH
FUNCTION	RED FLASH, RED STABLE GREEN FLASH, GREEN STABLE TORCH ON TOP, WHIST LE
TORCH	YES
BATTERY	RECHARGEABLE BATTERY - 3PCS 600MAH NIMH BATTERY
MATERIAL	PIPE- PVC, HANDLE-AS
LIGHT AREA	260MM



FLASHER

SIZE	26CM/11 INCH
DIA	4CM
LEDS	9R+9G+1H TORCH
FUNCTION	RED FLASH, RED STABLE GREEN FLASH, GREEN STABLE TORCH ON TOP
TORCH	YES
BATTERY	RECHARGEABLE BATTERY 3PCS 600MAH NIMH BATTERY
MATERIAL	PIPE-PC HANDLE-ABS
LIGHT AREA	160MM



FLASHER (SUPER HEAVY WHISTE)

SIZE	20.7CM
DIA	3CM
LEDS	1LED
FUNCTION	RED/GREEN TURN, WHISTLE
TORCH	YES
BATTERY	3.7V 2000mAh
MATERIAL	ABS
LIGHT AREA	80MM



FLASHER STOP GO

SIZE	LENGTH 37CM
DIA	200MM
LEDS	19G+9R+1W TORCH
FUNCTION	RED BLINKING, GREEN BLINKING
TORCH	YES
BATTERY	RECHARGEABLE
MATERIAL	PIPE-PVC, HANDLE-ABS

FLASHER STOP GO


SIZE	LENGTH 33CM
DIA	175MM
LEDS	9R+1W TORCH
FUNCTION	RED BLINKING, RED STABLE GREEN ONLY REFLECTIVE.
TORCH	YES
BATTERY	RECHARGEABLE
MATERIAL	PIPE-PVC, HANDLE-ABS



SOLAR ROAD STUDY

SOLAR STUD S2MAL6 WITH STEM/SHANK

SIZE	132X122X75 MM, SHANK-50MM(H)X30MM(DIA)
SOLAR PANEL	0.3W
NI-MH BATTERY	1.2V/1200mAh
WORK MODE	FLASH
WORKING HOURS	96HOURS
COLOR	RED/YELLOW/GREEN/WHITE
LED	6PCS SUPER BRIGHT DIA 5MM LED PER SIDE
VISIBILE DISTANCE	1000MTR
MATERIAL	ACRYLIC REFLECTOR +PC CAP+ALUMINIUM FRAME
COMPRESSION RESISTANCE	30 TONS
WATERPROOF	>IP68
LANE	TO BE INSTALLED IN THE CORNER OF ROAD ONLY FOR LONG LIFE

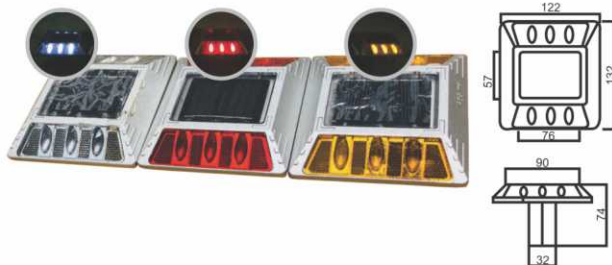

SIZE	115*100*22MM
SOLAR PANEL	3V90mA
NI-MH BATTERY	1.2V/1200mAh
WORK MODE	FLASH
WORKING HOURS	60HOURS
COLOR	RED/YELL OW
LED	6PCS SUPER BRIGHT DIA 5MM LED PER SIDE
VISIBILE DISTANCE	500MTR
MATERIAL	ACRYLIC REFLECTOR +PC CAP+ALUMINIUM FRAME
COMPRESSION RESISTANCE	30 TONS
WATERPROOF	>IP68
LANE	TO BE INSTALLED IN THE CORNER OF ROAD ONLY FOR LONG LIFE


SOLAR STUD S2MAL1R3 WITHOUT STEM/SHANK

SIZE	100X110X23MM
SOLAR PANEL	3V90mA
NI-MH BATTERY	1.2V/1200mAh
WORK MODE	FLASH
WORKING HOURS	96HOURS
COLOR	RED/YELL OW
LED	6PCS SUPER BRIGHT DIA 5MM LED PER SIDE
VISIBILE DISTANCE	1000MTR
MATERIAL	ACRYLIC REFLECTOR +PC CAP+ALUMINIUM FRAME
COMPRESSION RESISTANCE	30 TONS
WATERPROOF	>IP68
LANE	TO BE INSTALLED IN THE CORNER OF ROAD ONLY FOR LONG LIFE



FRONT

BACK

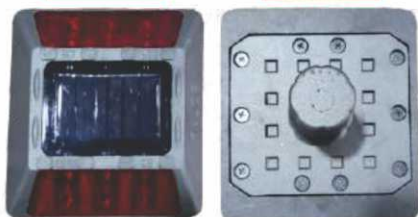

SOLAR STUD S2MAL5 WITH STEM/SHANK

SIZE	132X122X75MM, SHANK-60MM(H)X30MM(DIA)
SOLAR PANEL	2.2W
NI-MH BATTERY	1.2V/1300MAH
WORK MODE	FLASH
WORKING HOURS	24HOURS
COLOR	RED/YELL OW
LED	6PCS SUPER BRIGHT DIA 5MM LED PER SIDE
VISIBILE DISTANCE	500MTR
MATERIAL	ALUMUMINIUM
COMPRESSION RESISTANCE	15TONS
WATERPROOF	>IP65
LANE	TO BE INSTALLED IN THE CORNER OF ROAD ONLY FOR LONG LIFE



SIZE	115MMX90MMX20MM, SHANK-45MM(H)X20MM(DIA)
SOLAR PANEL	3.5V
NI-MH BATTERY	1.5V/1300MAH
WORK MODE	FLASH
WORKING HOURS	24HOURS
COLOR	RED/YELL OW
LED	6PCS SUPER BRIGHT DIA 5MM LED PER SIDE
VISIBILE DISTANCE	500MTR
MATERIAL	PC
COMPRESSION RESISTANCE	10TONS
WATERPROOF	>IP65
LANE	TO BE INSTALLED IN THE CORNER OF ROAD ONLY FOR LONG LIFE

SOLAR FLASHERS/ SOLAR BLINKERS



SOLAR CHEVRONS

SIZE	600X900MM, 600X750MM
SOLAR PANEL	10W SOLAR PANEL WITH 5YR WARRANTY
NI-MH BATTERY	6V10MAH
WORK MODE	RIGHT ARROW, LEFT ARROW
WORKING HOURS	108 HOURS
COLOR	RED/YELLOW
LED	117X130MM
VISIBILITY DISTANCE	500MTR
MATERIAL	SHEET METAL/3M TAPE/ACP 2MM SHEET
WATERPROOF	CAN BE USED IN RAINY DAY, BUT NOT IP68



SOLAR BARRICADE LIGHT

SIZE	380MM*400MM*101MM
SOLAR PANEL	5V170MA
NI-MH BATTERY	3.7/2AH LI BATTERY
WORK MODE	FLASHING/OFF
WORKING HOURS	12HOURS
COLOR	RED
LED	8PCS OF DIA 85MM HIGH INTENSIVITY LED
VISIBILITY DISTANCE	500MTR
MATERIAL	PP, ACRYLIC
WATERPROOF	CAN BE USED IN RAINY DAY, BUT NOT IP68



SOLAR BARRICADE LIGHT

SIZE	360X125X200MM
SOLAR PANEL	1.8W, 9V/200MA
NI-MH BATTERY	6V/5AH
WORK MODE	FLASHING/OFF
WORKING HOURS	200 HOURS
COLOR	RED AND BLUE
LED	48RED+48BLUE
VISIBILITY DISTANCE	1KM
MATERIAL	PC lens, PP frame and ABS base
WATERPROOF	CAN BE USED IN RAINY DAY, BUT NOT IP68

SOLAR BLINKER

SIZE	HEIGHT-22.5CM, DIA-18CM
SOLAR PANEL	5V160MA
NI-MH BATTERY	3.7V 2000MAH
WORK MODE	4 FUNCTIONS
WORKING HOURS	24HOURS
COLOR	RED/YELLOW
LED	9 PCS HIGH INTENSITY LED BULB
VISIBILITY DISTANCE	500MTR
MATERIAL	FRAME-PP SHEET GLASS
WATERPROOF	CAN BE USED IN RAINY DAY, BUT NOT IP68
SPECIAL FUNCTION	IT WORK ON SOLAR AND ALSO YOU CAN RECHARGE THE SAME WITH CHARGER.
USAGE	CAN BE FIT ON BARRIER, CONES, PAVEMENT, ROAD



STANCHION POST AND ACCESSORIES



STANCHION POST ECO

DIAMETER OF POLE	63MM
BELT SIZE	2MTR, 2.75MTR
HEIGHT OF POLE	1000MM
BASE	320X320MM
WEIGHT	8 KG./CUSTOMIZATION UPTO 12 KG.



STANCHION POST SUPREME

DIAMETER OF POLE	51MM
ROPE SIZE	1.5MTR
HEIGHT OF POLE	895MM
BASE	320X320MM
WEIGHT	8 KG./CUSTOMIZATION UPTO 12 KG.



STANCHION POST DOUBLE BELT

DIAMETER OF POLE	63MM
BELT SIZE	2.75MTR x 2
HEIGHT OF POLE	910MM
BASE	320X320MM
WEIGHT	8 KG./CUSTOMIZATION UPTO 12 KG.




STANCHION POST WITH SCREEN

DIAMETER OF POLE	51MM
BELT SIZE	985MM
HEIGHT OF POLE	1000MM
BASE	320X320MM
WEIGHT	8 KG./CUSTOMIZATION UPTO 12 KG.

S2MTL-1

TOTAL LENGTH	485MM
TOTAL WIDTH	275MM
LOCK AREA	175-275MM
NO. OF KEYS	3
USAGE	FOR SMALL CAR

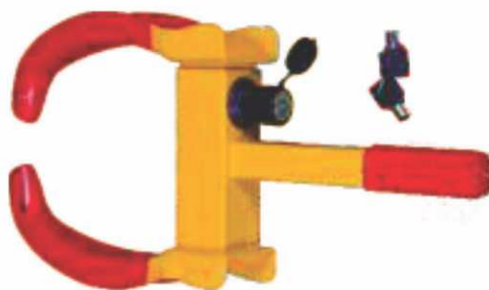


S2MTL-2

TOTAL LENGTH	540MM
TOTAL WIDTH	420MM
LOCK AREA	420X200MM
NO. OF KEYS	2
USAGE	FOR SUV's & TEMPO's

S2MTL-3

TOTAL LENGTH	800MM
TOTAL WIDTH	450MM
LOCK AREA	450x200MM
NO. OF KEYS	2
USAGE	FOR SUV's & SMALL TRUCK

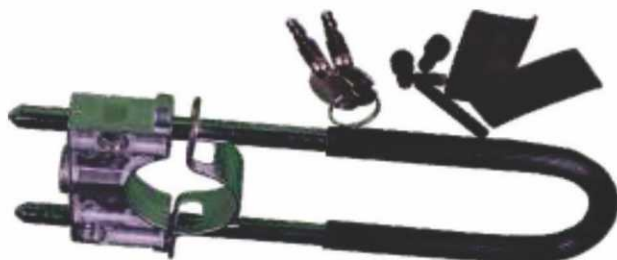

S2MML-1

TOTAL LENGTH	260MM
TOTAL WIDTH	70MM
LOCK AREA	10MM
NO. OF KEYS	2
USAGE	FOR MOTORCYCLE

MEDIAN MARKERS




1. **Model No. PS 960 PLASTIC MEDIAN MARKERS:** - Made up of tough, impact resistant thermoplastic body, reflectorized on both side using appx. 85 x 85mm (for square shape Fluorescent yellow prismatic sheeting (type – XI) reflective surface should be incline to appx. 20 degree to vertical to provide maximum reflective. Height & Width of Median marker is approx 110mm with all fixing arrangements.



2. **Model No. PS 960F PLASTIC FLAP MEDIAN MARKERS:** - Made up of Flexible, impact resistant thermoplastic body, reflectorized on both side using appx. 90 x 100mm (Fluorescent yellow prismatic sheeting (type – XI) reflective surface should be flat to 90° degree to vertical to provide maximum reflective. Height & Width of Median marker is approx 110mm with all fixing arrangements.



3. **Model No. PS 960A MS MEDIAN MARKERS:** - Made up of Moulded Galvanized Sheet, impact resistant MS body, reflectorized on both side using appx. 85 x 85mm (for square shape Fluorescent yellow prismatic sheeting (type – XI) reflective surface should be incline to appx. 20 degree to vertical to provide maximum reflective. Height & Width of Median marker is approx 110mm with all fixing arrangements.

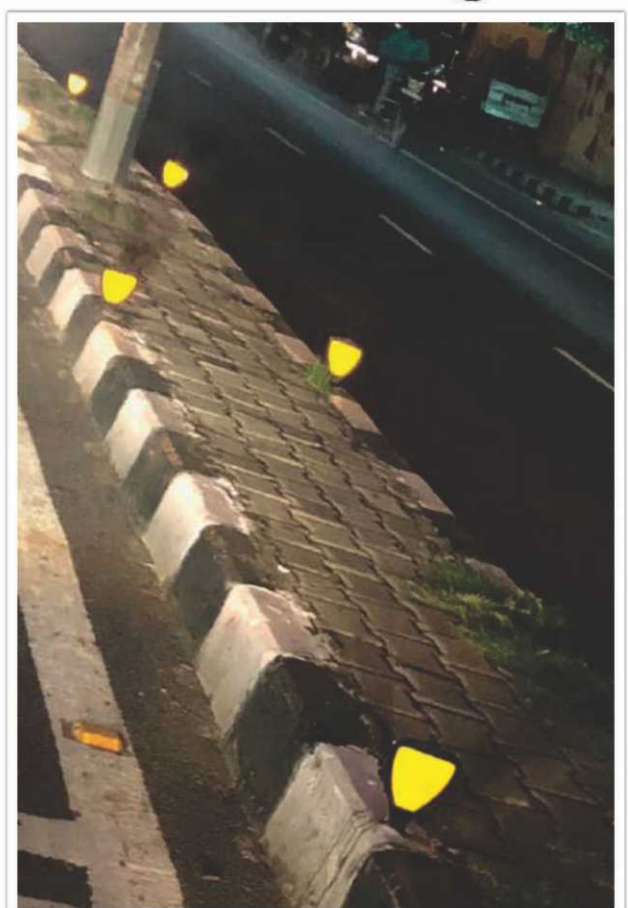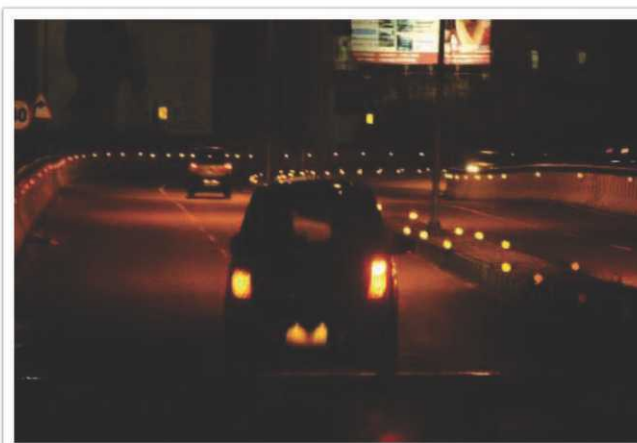


MEDIAN MARKERS

MS Delineators are ideally suitable for dangerous curves, central verges, Island etc. High Quality reflectors and tapes are fixed on post to make it highly visible in night and dark weather condition. They can be installed horizontally as well as vertically. Due to specially designed body and reflectors fixation method, their reflectivity and durability remain for a long life.



Made up of M.S. Holder, duly powder coated in black / white colour. It shall be fitted with two nos.100mm dia and high reflective reflectors (Acrylic) to give excellent reflectivity during night times. MS Holders having Jali & Mesh for reflector protection & for anti theft. Blt Clump Delineator shall be fixed on Bridges or Flyover's Poles.

S2M 953
Clump Delineator

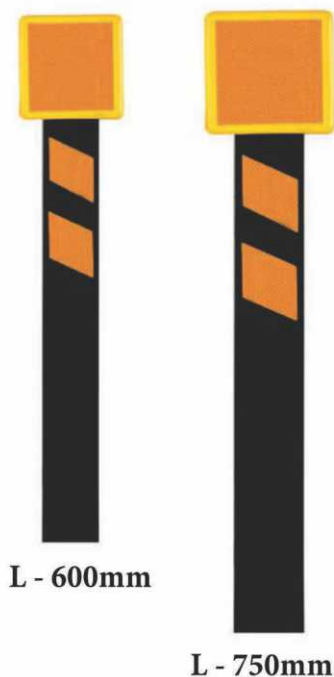

DUAL-DIRECTIONAL delineator made out of 16 gauge MS RECTANGULAR PIPE of size 25 x 68 mm and of length 600 mm / 750mm Pipe stove enamelled and baked to 1200C OR powder coated. Head made out of ABS plastic rectangular moulded with flat face provided with High Intensity Prismatic Reflectors of colour (white/yellow/red) of size 100 x 125 mm with additional 2 reflective strips of 50 mm wide.



PART NO.	S2M 945	S2M 915	S2M 952	S2M 954	S2M 944
Dimensions (Dia x Length)	50 x 750mm	50 x 750mm	50 x 750mm	65 x 750mm	75 x 900mm
No. of Tapes or Reflectors	x3 Radium Tapes	x3 HIP Tapes	x2 Acrylic Reflectors	x2 Acrylic Reflectors	R a d i u m Tapes
Mesh	Available	Available	Available	Available	Available



S2M 943



S2M 951



S2M 946



S2M 949

PART NO	S2M 943	S2M 951	S2M 946	S2M 949
Dimensions (Dia x Length)	50 x 900mm	75 x 1200mm	25 x 50 x 1000mm	30 x 115 x 1200mm
No. of Tapes or Reflectors	x 2 Round & 1 Rectangle Reflectors both sides	x3 HIP Tapes	x2 HIP Tapes with PVC Box	HIP Tapes
Mesh	NA	Available	NA	NA



S2M 1954

PART NO.	S2M 1954
Length	1070mm
Face Width	87mm
Shape	Edge Curves
No. of Tapes	x3 HIP Tapes both Sides





S2M 948

Model No. PS 948: Road Safety Bollards having : - 3mm thick 400 x 400mm square ACP Sheet duly affixed with 9nos. 100mm round acrylic made highly intensity reflectors. Or Aluminium Composite Metal (ACM) (Overall thickness – 3mm, having aluminium foil of thickness 0.2mm on both the side). All the three plates shall be mounted on 65mm dia, 1.2mm powder coated M.S. Pipe in the sequential arrangement (downward). The plates shall be fixed with pipe having anti theft locking arrangement. The overall length of Bollard including grouting portion is 3000mm.

Made from Virgin Plastic & Synthetic rubber parking blocks and corner guards. **Applications:** • Parking

S2M 824

PU Corner Guard
H-900mm x W 100mm

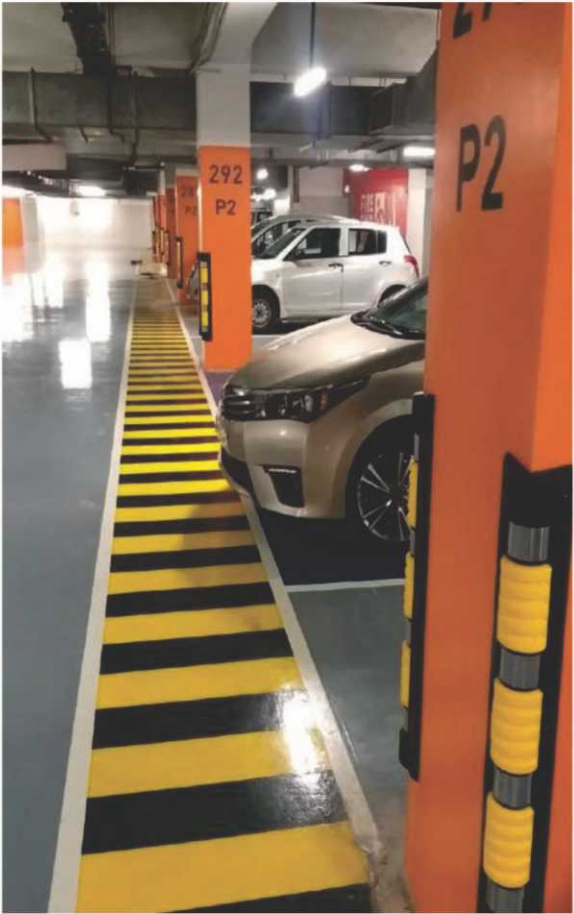

We can also manufacture any size/design according to customers requirement

CORNER GUARD / PILLAR GUARD

Plastic Corner Guard
H-800mm x W 100mm
All Colours Available



S2M-L-800 CG 9(P)

Rubber Corner Guard
H-800mm x W 100mm



S2M-L-800 CG (P)

Rubber Corner Guard
H-1000 mm x W 100mm



S2M-L-1000 CG (R)

Rubber Corner Guard
H-1200mm x W 100mm



S2M-L-1200 CG (R)

Rubber "U" Shape Corner Guard
H-900mm x W 100mm



S2M-L-900 CG (R)

Rubber "U" Shape Corner Guard
H-1000mm x W 100mm



S2M-R-1000 CG (R)

Rubber "U" Shape Corner Guard
H-1200mm x W 100mm



S2M-R-1200 CG (R)


WHEEL CHOCKS



S2M 804
240 x 175 x 160 mm
Weight - 3 Kg



S2M 807
250 x 170 x 182 mm
Weight - 6.5 Kg

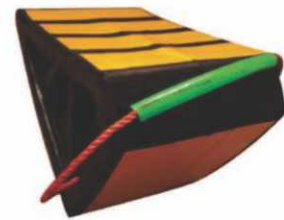

S2M 805
375 x 220 x 225 mm
Weight - 11.5 Kg



S2M 804
250 x 170 x 150 mm
Weight - 1.2 Kg



S2M 810
285 x 175 x 200 mm
Weight - 1.8 Kg



S2M 811
470 x 200 x 280 mm
Weight - 4.5 Kg

BASE IMAGE



S2M 803
500 x 160 x 100 mm



S2M 806
500 x 160 x 100 mm



S2M 802
500 x 150 x 100 mm



Wheel Chock with stand



Wheel Chock with Trolley

CABLE PROTECTORS



2 CHANNEL



3 CHANNEL



5 CHANNEL



Rubber Lane Divider
1000x150x60 mm



Dock Bumper
450x250x100 mm
Weight - 10 Kg



Dock Bumper D-Type
500x150x150 mm
Weight - 13 Kg




Round Pillar Guard
1000x190x10 mm

OPEN CHANNELS



S2M 851

Material: Poly Ethylene
Dimension: 1000x285x35 mm
Slot Size: 110x27 mm

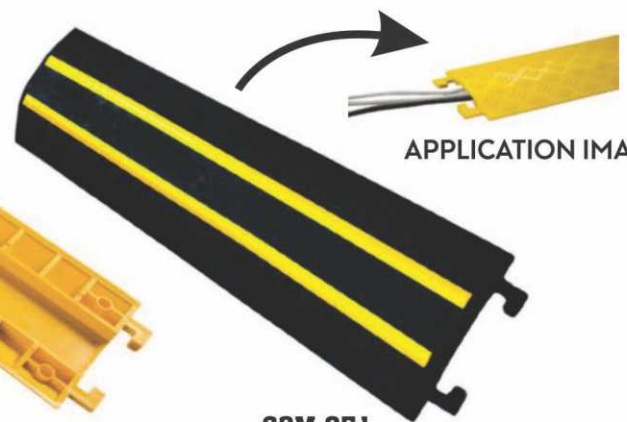

S2M 851

Material: PVC Rubber
Dimension: 1000x285x35 mm
Slot Size: 110x27 mm
Weight: 4 Kg

APPLICATION IMAGE

S2M Safety Nets are fabricated from Polypropylene ropes (as per IS 5175) in knotted meshes to enhance effectiveness of fall arrest function. It has imparts high breaking strength to support heavy load impacts & stabilized against adverse atmospheric conditions to ensure longer life. It is available to match and meet specific requirements in size and shapes.

Polypropylene Wooden Rope Ladder

Rungs Dia - 35mm; Rope Dia - 16 mm

Polypropylene Aluminum Rope Ladder

Rungs Dia - 25mm; Rope Dia - 12 mm


Safety Net Size	Mesh Size	Mesh Rope	Additional
10 m x 5 m	25 mm	2mm Double Cord	-
10 m x 5 m	100 mm	4 mm	-
10 m x 5 m	100 mm	4 mm	Overlay
10 m x 3 m	25 mm	2 mm Double Cord	-
10 m x 3 m	100 mm	4 mm	-
10 m x 3 m	100 mm	4 mm	Overlay



**Aluminium
Rope**



**Wooden
Rope**

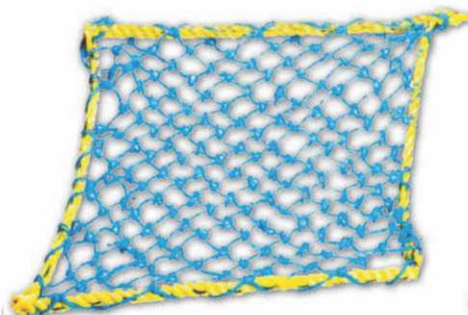

2mm Double cord net



Overlay net

FLOOR MARKING TAPE



MISCELLANEOUS PRODUCTS

12. Model No. S2M 4108 Breathe Analyser



PS 4108

13. Model No. S2M 4109 Nose Mask



14. **Model No. S2M 4112 BARRICADING TAPE:** - Made of Polythene strip in two colour lamination, Ultraviolet scratch resistant, width of strip 50mm, 75mm & 100mm and length of roll 100/ 300/500mtr. Printing message shall be accordingly to requirement of purchaser.



15. Canopy All Sizes



STANDARD SIZE
10 x 10 FEET



SEARCH MIRRORS

Under Vehicle Bombs Search Trolley Mirror Handle Bar-Stright or telescopic handle bar length 4ft approx Moment Roller wheels provided for free & easy movement Base Tilt Suitable design for clear view Light Source (optional) Commando touch Fully Telescopic Extension Search Mirror Approx Telescopic handle bar Handle extendable up to 4ft approx Light Source can be mounted (optional)



S2M 1204

Mirror Size : 2 ft x 1 ft
Also available
Mirror : size 24" x 18"



S2M 1205

Mirror size : 9"x 5"

CONVEX MIRROR

Made up of Polycarbonate Reflective Mirrors. Body is made of ABS/Fiber/ Palstic. Suitable for indoor/Outdoor use with hood. Complete with mounting hardware (with/without pipe).



Dimension- 45cm



Dimension- 60cm



Dimension- 80cm



Dimension- 100cm



PERSONAL PROTECTIVE EQUIPMENTS (PPE)



S2M 601



S2M 602



S2M 603



S2M 604



S2M 605



S2M 610



Loader



NAP



Rachet



Gum Boot



S2M 201



S2M 202



S2M 203




Shoes



High ankle shoe



Electrical Gloves



Leather Gloves



Rubber Gloves



Dotted Gloves



Safety Harness





8 mm Knotted Triple Layer Type Safety Nets

Herder & Tie Cord Rope - 12mm IS:5175:1992 Inside Rope/ Mesh Rope - 6mm -15:5175:1992 Mesh size 100mm x 100mm Square/ 4"x 4" Second Layer - Overlay Containment Net of HOPE UV Stabilized Blue Net Third Layer - Monofilament IN Stabilized Net Green/Red 120 GSM Fabricating - Passing With Knelled Type De Roue & De Caul Tie cords 2 metre long at four corners and 1 metre long at every 2 metre Standard Size - 5 x 10 Mir or 3 x 10 MO Standard/ Approved - P.P. Rope Certified to IS:5175:1992 & Safety Net Made By as Per IS:11057:1984 (OPT

2.5 mm Braided Safety Nets (Single Layer - 25mm Mesh)

Bowler & TIE Bore Rope -12mm - IS:5175:1992 Insure Twine Mesr Twine - 2.5 mm HOPE Twine Mesr Sae - 25mm i 25mm Square :- "atincating - hew treated knotting Tic Rope & Tie Cord - Tie cords 2 metre long at four corners and 1 metre long at ever; Stanoarc Size - 5 r 10 Mb Stanoara Approved - P.P. Rope Certified to IS:5175:1992 & Safety Net Made By EN-1263 (OPTIONS DE CUSTOMIZED SIZES ARE ALSO AVAILABLE)



2.5 mm Braided Safety Nets (Double Layer - 25mm Mesh) Border & Tie Cord Rope - 12mm -15:5175:1992 Inside Twine/ Mesh twine - 2.5 non HOPE Twine Mesh Size - 25mm x 25mm Square Second Layer Monofilament 00 Stabilized Net with Welding / Grinding Splatter Resistant Green/Red 100 GSM tie Rope & Tie Cord Tie cords 2 metre long at four corners and 1 metre long at even/ 2 metre Standard Size - 5 x 10 Mir Standard/ Approved P.P. Hope Certified to IS:5175:1992 & Safety Net Made By EN-1263 (OPTIONS 01 CUSTOMIZED SIZES ARE ALSO AVAILABLE)



14 mm Knotted Triple Layer Type Safety Nets




Border & Tie Cord Rope - 12mm
Inside Rope/ Mesh Rope - 4mm
Mesh size - 100mm x 100mm Square/ 4"x4"
Second Layer - Overlay Containment Net of HOPE UV Stabilized Blue Net
Third Layer - Monofilament UV Stabilized Net Green/Red
100 GSM Fabricating - Diamond type Knotted
Tie Rope & Tie Cord - Tie cords 2 metre long at four corners and 1 metre long at every 2 metre
Standard Size - 5 x 10 Mtr or 3 x 10 Mtr
Standard/ Approved - P.P. Rope Certified to IS:5175:1992 & Safety Net Made By as Per IS:11057:1984 (OPTIONS OF CUSTOMIZED SIZES ARE ALSO AVAILABLE)

Mono Nets Type Safety Nets

Green/Red 120 GSM
Fabricating - Diamond type Knotted
Tie Rope & Tie Cord - Tie cords 2 metre long at four corners and 1 metre long at every 2 metre
Standard Size - 5 x 10 Mtr Or 3 x 10 Mtr
Standard/ Approved - P.P. Rope & Safety Net
(OPTIONS OF CUSTOMIZED SIZES ARE ALSO AVAILABLE)



6mm Knotted Triple Layer Type Safety Nets

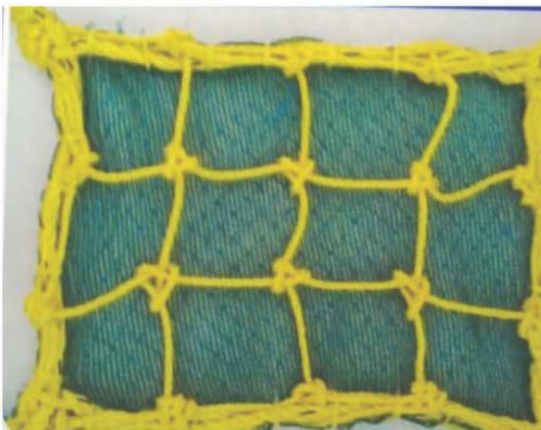

Border & Tie Cord Rope - 12mm
Inside Rope/ Mesh Rope - 6mm
Mesh size - 100mm x 100mm Square/ 4"x4"
Second Layer - Overlay Containment Net of HOPE UV Stabilized Blue Net
Third Layer - Monofilament UV Stabilized Net Green/Red 120 GSM
Fabricating - Diamond type Knotted
Tie Rope & Tie Cord - Tie cords 2 metre long at four corners and 1 metre long at every 2 metre
Standard Size - 5 x 10 Mtr Or 3 x 10 Mtr
Standard/ Approved - RP. Rope & Safety Net
(OPTIONS OF CUSTOMIZED SIZES ARE ALSO AVAILABLE)





S2M ENTERPRISES

Deals in: All Safety Equipments Suppliers) All Safety Item & Helmet, Safety Shoes, Noes Mask. Ear Plug, Speed Breakers, Caution Tapes Safety Jackets, Cones, Con Search, Light Baton, Light, Rain Cost Reflectors, Road Studs Etc.

**Address :K-111, Sec. 9. Vijay Nagar,
Ghaziabad, U P.-201001**

Email : s2menterprises1@gmail.com

M.: 9990077066, 9990077046

